Articulated feet

(base in reinforced polyamide)

ø 30 Part. **118**

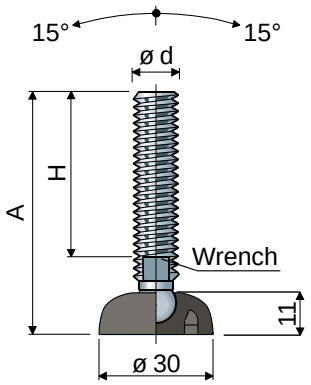

Spindle measures in mm				Spindle material			
ød	A	H	Wrench	Zinc plated steel Code	Stainless steel AISI 304 Code	Stainless steel AISI 316 Code	Max static load (N)
M8x1,25	65	45	6	**118 / 84270**	**118 / 84271**	-	9000
	85	65	6	**118 / 84272**	**118 / 84273**	-	
	127	107	6	**118 / 90798**	**118 / 90799**	-	
M10x1,5	57	35	8	**118 / 84274**	**118 / 84275**	-	10000
	92	70	8	**118 / 84276**	**118 / 84277**	-	
	137	115	8	**118 / 84278**	**118 / 84279**	-	
M12x1,75	67	43	10	**118 / 84280**	**118 / 84281**	-	11000
	87	63	10	**118 / 84282**	**118 / 84283**	-	
	102	77	10	**118 / 84284**	**118 / 84285**	-	
	117	93	10	**118 / 84286**	**118 / 84287**	**118 / 85116**	
	147	123	10	**118 / 84288**	**118 / 84289**	-	

Spindle measures in inches				Spindle material		
ød	A	H	Wrench	Zinc plated steel Code	Stainless steel AISI 304 Code	Max static load (N)
1/2"-13 UNC	5,08"	4"	7/16"	**118 / 85170**	**118 / 85140**	11000

Base material: Reinforced polyamide black colour.
Box quantity: 24 pieces.

Accessories
Anti-slip pads:
- **code:** 84290;
- **material:** thermoplastic rubber 68 Shore black colour;
- **box quantity:** 24 pieces.



Washers UNI 6592-69 - **Box quantity:** 24 pieces.



ø M	M8	M10	M12
Smm	1,6	2	2,5
ø A mm	17	21	24
Zinc plated steel codes	7636	7283	7284
Stainless steel codes	7637	7286	7287

Nuts UNI 5588-65 - **Box quantity:** 24 pieces.



ø d	M8	M10	M12
Smm	6,5	8	10
Ch. mm	13	17	19
Zinc plated steel codes	7634	7269	7270
Stainless steel codes	7635	7272	7273

On request
- **Bases:** In reinforced polypropylene (maximum static load is reduced to 1/3 compared to that with polyamide base) • other colours.
- **Spindles with:** Sunk hexagon head • second wrench seat head • hexagon wrench seat • threads with other pitches and lengths.
- **Assembling of:** Anti-slip pads • nuts • washers.
- **Box quantity:** According to your request.

Thread sizes in inches are expressed as the number of threads (UNC coarse thread) per Imperial inch